



应用领域

用于机器人、航空航天设备、高铁地铁、电力发电、铁路轨道交通、船舶、化学工业、通信系统、工程设备安装、工业自动化设备、机床机械设备、照明设备、电气绝缘保护系统等室内外环境的电线电缆保护。

NICKEL-PLATED BRASS CABLE GLAND SERIES

黄铜电缆接头系列

采用黄铜棒材制成，外型美观，用于紧固电线电缆，锁线范围大，并达到一定的防护等级和抗拉、抗扭能力，适用于电源进线、仪表、照明、监控、电箱等。

螺纹选择：M公制螺纹、PG德制螺纹、G英制螺纹、NPT美标螺纹。

材质选择：黄铜镀镍

防护等级：IP68

选型注意事项：常规产品，可根据页面型号进行选型，非标产品请联系我们销售或技术参与选型。

Made of high quality brass with good appearance. It is used to tighten wires and cables, has a wide cable range, and to achieve a certain level of IP protection and tension resistance torsion resistance. Applied to the power line, instrumentation, lighting, monitoring system, electrical boxes, etc.

Thread: Metric, PG, G and NPT thread.

Material: Nickel-plated brass

Protection Degree: IP68

Selection precautions: Standard products can be selected according to the page model.

For non-standard products, please contact us



LNE-M 黄铜连体式电缆防水接头
Brass Integrated Type Waterproof Cable Gland



产品材质：A.C.F部位采用优质黄铜镀镍，B.E部位采用丁腈橡胶制成，D部位采用白色尼龙制成。
螺纹规格：公制(M)
工作温度：-40°C至+110°C，短时可达+120°C。
产品颜色：A.C.F部位为金属色，B.E部分为黑色，D部分为白色。
防护等级：IP68
产品特性：特殊夹紧爪与密封件相扣之设计，配合迫紧头装配省时便利，夹紧电缆范围大，抗拉力特强，可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C and F are Nickel-plated brass material; Part B and E are Chemigum material, and part D is white polyamide material.
Specification of thread: Metric
Working temperature: -40°C ~ +110°C, instantaneously can be 120°C.
Color: Part A, C and F are metallic yellow, Part B and E are black, Part D is white.
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	螺纹外径(mm) Thread Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	AG	GL	SW	PCS
LNE-M-M8	M8×1.0	3-6.5	8	6		100
LNE-M-M10	M10×1.0	3-6.5	10	6	15	100
LNE-M-M12	M12×1.5	3-6.5	12	6	16	100
LNE-M-M14	M14×1.5	3-6.5	14	7	17	100
LNE-M-M16	M16×1.5	4-8	16	7	20	100
LNE-M-M18	M18×1.5	6-10	18	7	22	50
LNE-M-M20	M20×1.5	6-12(8-14)	20	8	26	50
LNE-M-M22	M22×1.5	10-14	22	8	30	50
LNE-M-M24	M24×1.5	10-14	24	9	30	50
LNE-M-M25	M25×1.5	10-14(13-18)	25	9	32	50
LNE-M-M27	M27×2	13-18	27	9	35	50
LNE-M-M30	M30×2	13-18	30	9	40	20
LNE-M-M32	M32×1.5	15-22	32	9	40	20
LNE-M-M36	M36×2	18-25	36	9	42	20
LNE-M-M40	M40×1.5	18-25	40	10	50	20
LNE-M-M42	M42×2	22-32	42	10	50	20
LNE-M-M48	M48×2	25-32	48	10	60	10
LNE-M-M50	M50×1.5	32-38	50	10	60	10
LNE-M-M54	M54×2	32-28	54	10	65	10
LNE-M-M56	M56×2	32-28	56	10	65	10
LNE-M-M60	M60×2	37-44	60	12	72	10
LNE-M-M63	M63×1.5	37-44	63	12	75	10
LNE-M-M64	M64×2	37-44	64	12	75	10
LNE-M-M72	M72×2	42-52	72	15	85	5
LNE-M-M80	M80×2	50-60	80	16	95	5
LNE-M-M85	M85×2	59-72	85	16	100	5
LNE-M-M100	M100×2	70-82	100	20	120	1

LNE-M 黄铜连体式电缆防水接头
Brass Integrated Type Waterproof Cable Gland




产品材质：A.C.F部位采用优质黄铜镀镍，B.E部位采用丁腈橡胶制成，D部位采用白色尼龙制成。
螺纹规格：德制(PG)、英制(G)【美制(NPT)可定制】
工作温度：-40°C至+110°C，短时可达+120°C。
产品颜色：A.C.F部位为金属色，B.E部分为黑色，D部分为白色。
防护等级：IP68
产品特性：特殊夹紧爪与密封件相扣之设计，配合迫紧头装配省时便利，夹紧电缆范围大，抗拉力特强，可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C and F are Nickel-plated brass material; Part B and E are Chemigum material, and part D is white polyamide material.
Specification of thread: PG,G(NPT can be customized)
Working temperature: -40°C ~ +110°C, instantaneously can be 120°C.
Color: Part A, C and F are metallic yellow, Part B and E are black, Part D is white.
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	螺纹外径(mm) Thread Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	Φ	AG	GL	SW	PCS
LNE-M-PG7	PG7	3-6.5	12.5	6	15	100
LNE-M-PG9	PG9	4-8	15.2	7	20	100
LNE-M-PG11	PG11	5-10	18.6	7	21	100
LNE-M-PG13.5	PG13.5	8-12	20.4	8	23	50
LNE-M-PG16	PG16	10-14	22.5	8	25	50
LNE-M-PG21	PG21	13-18	28.3	8	32	50
LNE-M-PG29	PG29	18-25	37	9	42	20
LNE-M-PG36	PG36	25-32	47	10	56	10
LNE-M-PG42	PG42	32-38	54	10	62	10
LNE-M-PG48	PG48	37-44	59.3	12	70	10

订货号 Order No.	螺纹标准(英制) Thread standard(G)	卡口范围(mm) Range Of Bayonet	螺纹外径(mm) Thread Diameter	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	AG	GL	SW	PCS
LNE-M-G1/4	G1/4	3-6.5	13.2	6	17	100
LNE-M-G3/8	G3/8	4-8	16.5	8	20	100
LNE-M-G1/2	G1/2	8-12	21.3	8	23	50
LNE-M-G3/4	G3/4	13-18	26.6	9	30	50
LNE-M-G1	G1	15-22	33.4	10	38	20
LNE-M-G1-1/4	G1-1/4	18-25	42.1	12	50	10
LNE-M-G1-1/2	G1-1/2	22-32	47.8	13	54	10
LNE-M-G2	G2	37-44	59.6	13	65	10

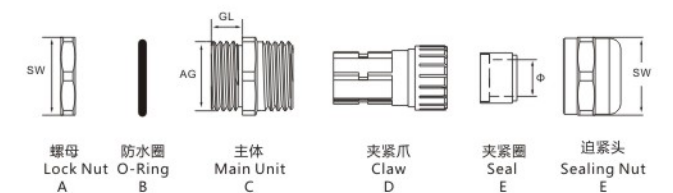

LNE-MT 黄铜分体式电缆防水接头
Brass Split Type Waterproof Cable Gland



产品材质: A.C.F部位采用优质黄铜镀镍, B.E部位采用丁腈橡胶制成。
螺纹规格: 公制(M)
工作温度: -40°C至+110°C, 短时可达+120°C。
产品颜色: A.C.F部位为金属色, B.E部分为黑色。
防护等级: IP68
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C and F are Nickel-plated brass material; Part B and E are Chemigum material.
Specification of thread: Metric
Working temperature: -40°C~+110°C, instantaneously can be 120°C.
Color: Part A, C and F are metallic yellow, Part B and E are black.
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	GL	SW	PCS
LNE-MT-M12	M12X1.5	3-6.5	6.0	15	50
LNE-MT-M14	M14X1.5	3-6.5	6.0	16	50
LNE-MT-M16	M16X1.5	4-8	7.0	17	50
LNE-MT-M18	M18X1.5	6-10	8.0	20	50
LNE-MT-M20	M20X1.5	6-12	8.0	22	50
LNE-MT-M22	M22X1.5	10-14	9.0	26	50
LNE-MT-M24	M24X1.5	10-14	10.0	30	25
LNE-MT-M25	M25X1.5	10-14	10.0	30	25
LNE-MT-M27	M27X2.0	13-18	11.0	32	25
LNE-MT-M30	M30X2.0	13-18	11.0	35	25
LNE-MT-M32	M32X1.5	15-22	11.0	40	25
LNE-MT-M33	M33X2.0	15-22	11.0	40	20
LNE-MT-M36	M36X2.0	18-25	11.0	42	20
LNE-MT-M40	M40X1.5	18-25	11.0	50	20
LNE-MT-M42	M42X2.0	22-28	12.0	50	20
LNE-MT-M48	M48X2.0	25-32	13.0	60	10
LNE-MT-M50	M50X1.5	25-32	13.0	60	10
LNE-MT-M54	M54X2.0	32-38	14.0	65	10
LNE-MT-M56	M56X2.0	32-38	14.0	65	10
LNE-MT-M60	M60X2.0	37-44	14.0	72	10
LNE-MT-M63	M63X1.5	37-44	14.0	75	10
LNE-MT-M64	M64X2.0	37-44	14.0	75	10
LNE-MT-M72	M72X2.0	42-52	15.0	85	5
LNE-MT-M80	M80X2.0	50-60	18.0	95	5
LNE-MT-M85	M85X3.0	59-72	20.0	100	5
LNE-MT-M100	M100X2.0	71-82	22.0	120	5

LNE-MT 黄铜分体式电缆防水接头
Brass Split Type Waterproof Cable Gland




产品材质: A.C.E部位采用优质黄铜镀镍, B.D部位采用丁腈橡胶制成。
螺纹规格: 德制(PG)、英制(G)
工作温度: -40°C至+110°C, 短时可达+120°C。
产品颜色: A.C.E部位为金属色, B.D部分为黑色。
防护等级: IP68
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C and E are Nickel-plated brass material; Part B and D are Chemigum material.
Specification of thread: PG, G
Working temperature: -40°C~+110°C, instantaneously can be 120°C.
Color: Part A, C and E are metallic yellow, Part B and D are black.
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	Φ	GL	SW	PCS
LNE-MT-PG7	PG7	3-6.5	8.0	15	100
LNE-MT-PG9	PG9	4-8	8.0	17	100
LNE-MT-PG11	PG11	5-10	8.0	22	50
LNE-MT-PG13.5	PG13.5	8-12	9.0	26	50
LNE-MT-PG16	PG16	10-14	10.0	30	50
LNE-MT-PG21	PG21	13-18	11.0	32	50
LNE-MT-PG29	PG29	18-25	11.0	35	20
LNE-MT-PG36	PG36	25-32	13.0	55	10
LNE-MT-PG42	PG42	32-38	13.0	60	10
LNE-MT-PG48	PG48	37-44	14.0	72	10

订货号 Order No.	螺纹标准(英制) Thread standard(G)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	G	Φ	GL	SW	PCS
LNE-MT-G1/4	G1/4	3-6.5	6.0	16	100
LNE-MT-G3/8	G3/8	4-8	7.0	20	50
LNE-MT-G1/2	G1/2	8-12	8.0	24	50
LNE-MT-G3/4	G3/4	13-18	11.0	30	50
LNE-MT-G1	G1	15-22	11.0	38	50
LNE-MT-G1-1/4	G1-1/4	22-28	12.0	50	10
LNE-MT-G1-1/2	G1-1/2	25-32	13.0	55	10
LNE-MT-G2	G2	37-44	14.0	72	5

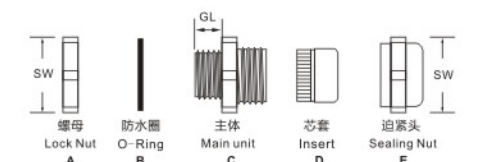

LNE-SGM 黄铜双锁紧电缆防水接头
Brass Double Locked Waterproof Cable Gland




产品材质: 外部采用优质黄铜镀镍, 内部芯套为环保尼龙, 密封件材料改性橡胶。
螺纹规格: 公制 (M) 德制 (PG)
防护等级: IP68
工作温度: -40°C至 +110°C, 短时可达 +120°C。
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product Material: body: nickel-plated brass, inner set: nylon, sealing: modified rubber
Specification of thread: Metric, PG
Protection classification: IP68
Working temperature: -40°C ~ +110°C, instantaneously can be 120°C.
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification have a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	GL	SW	PCS
LNE-SGM-M16	M16X1.5	4-8	6.5	18	50
LNE-SGM-M18	M18X1.5	5-10	6.5	22	50
LNE-SGM-M20	M20X1.5	6-12	7.8	22	50
LNE-SGM-M22	M22X1.5	10-14	7.3	26	50
LNE-SGM-M25	M25X1.5	13-18	7.5	30	50
LNE-SGM-M32	M32X1.5	18-25	8.0	35	20
LNE-SGM-M40	M40X1.5	22-32	12	50	10
LNE-SGM-M50	M50X1.5	32-38	12	57	10
LNE-SGM-M63	M63X1.5	37-44	12	65	10

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	Φ	GL	SW	PCS
LNE-SGM-PG11	PG11	4-8	7	22	50
LNE-SGM-PG13.5	PG13.5	5-10	7.8	22	50
LNE-SGM-PG16	PG16	6-12	7.5	24	20
LNE-SGM-PG21	PG21	13-18	8	30	20
LNE-SGM-PG29	PG29	18-25	9	40	20
LNE-SGM-PG36	PG36	22-32	12	50	10
LNE-SGM-PG42	PG42	32-38	12	57	10
LNE-SGM-PG48	PG48	37-44	12	65	10



LNE-M-PB 黄铜屏蔽电缆防水接头
Brass Shielding Waterproof Cable Gland




产品材质: A,C,F部位采用优质黄铜镀镍, B,E部位采用丁腈橡胶制成, D部位采用磷铜制成。
螺纹规格: 公制 (M)、德制 (PG)、英制 (G)、美制 (NPT)
工作温度: -40°C至 +110°C, 短时可达 +120°C。
产品颜色: A,C,D,F部位为金属色, B,E部分为黑色。
防护等级: IP68
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C and F are Nickel-plated brass material; Part B and E are Chemigum material and part D is Phosphor copper.
Specification of thread: Metric, PG, G, NPT
Working temperature: -40°C ~ +110°C, instantaneously can be 120°C
Color: Part A, C, D and F are metallic yellow, Part B and E are black.
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	GL	SW	PCS
LNE-M-PB-M16-8	M16X1.5	4-8	6.0	17	50
LNE-M-PB-M16-10	M16X1.5	5-10	6.0	18	50
LNE-M-PB-M18-10	M18X1.5	5-10	6.0	20	50
LNE-M-PB-M20-12	M20X1.5	6-12	7.0	22	50
LNE-M-PB-M20-14	M20X1.5	10-14	7.0	24	50
LNE-M-PB-M25-16	M25X1.5	10-16	7.0	28	50
LNE-M-PB-M25-18	M25X1.5	13-18	7.0	30	50
LNE-M-PB-M32-22	M32X1.5	15-22	8.0	36	25
LNE-M-PB-M32-25	M32X1.5	18-25	8.0	40	25
LNE-M-PB-M40-30	M40X1.5	22-30	9.0	50	20
LNE-M-PB-M50-38	M50X1.5	30-38	9.0	60	20

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	Φ	GL	SW	PCS
LNE-M-PB-PG9	PG9	4-8	6.0	17	100
LNE-M-PB-PG11	PG11	5-10	6.0	22	50
LNE-M-PB-PG13.5	PG13.5	6-12	7.0	26	50
LNE-M-PB-PG16	PG16	10-14	7.0	30	50
LNE-M-PB-PG21	PG21	13-18	8.0	32	50
LNE-M-PB-PG29	PG29	18-25	8.0	35	20
LNE-M-PB-PG36	PG36	22-32	9.0	55	10

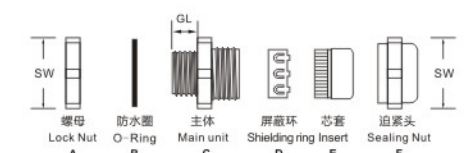

LNE-MP-SGM 黄铜双锁紧屏蔽型电缆防水接头 Brass Double Locked Shielding Waterproof Cable Gland




产品材质: 外部采用优质黄铜镀镍, 内部芯套为环保尼龙, 密封件材料改性橡胶。
螺纹规格: 公制 (M) 德制 (PG)
防护等级: IP68
工作温度: -40°C至 +110°C, 短时可达 +120°C。
产品特性: 特殊夹紧爪与密封件相扣之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product Material: body: nickel-plated brass, inner set: nylon, sealing: modified rubber
Specification of thread: Metric, PG
Protection classification: IP68
Working temperature: -40°C ~ +110°C, instantaneously can be 120°C.
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification have a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	GL	SW	PCS
LNE-MP-SGM-M16	M16X1.5	4-8	6.5	18	50
LNE-MP-SGM-M18	M18X1.5	5-10	6.5	22	50
LNE-MP-SGM-M20	M20X1.5	6-12	7.8	22	50
LNE-MP-SGM-M22	M22X1.5	10-14	7.3	26	50
LNE-MP-SGM-M25	M25X1.5	13-18	7.5	30	50
LNE-MP-SGM-M32	M32X1.5	18-25	8.0	35	20
LNE-MP-SGM-M40	M40X1.5	22-32	12	50	10
LNE-MP-SGM-M50	M50X1.5	32-38	12	57	10
LNE-MP-SGM-M63	M63X1.5	37-44	12	65	10

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	Φ	GL	SW	PCS
LNE-MP-SGM-PG11	PG11	4-8	7	22	50
LNE-MP-SGM-PG13.5	PG13.5	5-10	7.8	22	50
LNE-MP-SGM-PG16	PG16	6-12	7.5	24	20
LNE-MP-SGM-PG21	PG21	13-18	8	30	20
LNE-MP-SGM-PG29	PG29	18-25	9	40	20
LNE-MP-SGM-PG36	PG36	22-32	12	50	10
LNE-MP-SGM-PG42	PG42	32-38	12	57	10
LNE-MP-SGM-PG48	PG48	37-44	12	65	10




LNE-PK 黄铜平口电缆接头 Brass Marine Cable Gland



产品材质: 采用优质黄铜镀镍制成, 密封件材料为EPDM橡胶。
螺纹规格: 公制(M)
防护等级: IP68
工作温度: -40°C至 +100°C

Product material: nickel-plated brass, sealing part is EPDM rubber.
Thread specification: Metric
Protection classification: IP68
Working temperature: -40°C ~ +100°C

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	螺纹长度(mm) Thread Length	高度(mm) Height	螺母厚度(mm) Lock Nut Thickness	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	GL	H	L	SW1 SW2	PCS
LNE-PK-M20	M20X1.5	10-12	12.0	26.0	3.0	20 22	50
LNE-PK-M25	M25X1.5	15-18	12.0	33.0	3.0	30 33	50
LNE-PK-M32	M32X1.5	20-25	12.0	36.0	3.5	39 42	20
LNE-PK-M40	M40X1.5	28-32	15.0	41.0	4.5	50 52	20
LNE-PK-M50	M50X1.5	34-38	15.0	45.0	5.0	57 59	20
LNE-PK-M63	M63X1.5	38-44	15.0	48.0	5.0	64 66	10
LNE-PK-M75	M75X1.5	47-52	15.0	53.0	5.0	80 85	10




LNE-MD 黄铜多孔电缆防水接头 Brass Multi Entry Waterproof Cable Gland



产品材质: A.C.F部位采用优质黄铜镀镍, B.E部位采用丁腈橡胶制成, D部位采用白色尼龙制成。
 螺纹规格: 德制(PG)
 工作温度: -40°C至+110°C, 短时可达+120°C。
 产品颜色: A.C.F部位为金属色, B.E部分为黑色, D部分为白色。
 防护等级: IP68
 产品特性: 特殊夹紧爪与密封件相扣之设计, 配合追紧头装配省时便利, 夹紧电缆范围大, 抗拉力特强, 可防水、防尘、防盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: Part A, C and F are Nickel-plated brass material; Part B and E are Chemigum material, and part D is white polyamide material.
Specification of thread: PG
Working temperature: -40°C ~ +110°C, instantaneously can be 120 °C.
Color: Part A, C and F are metallic yellow, Part B and E are black, Part D is white.
Protection classification: IP68
Property: With design of clamping claw and sealing ,easy & fast assembled by sealing nut, each specification has a scope clamping,with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	孔数X孔径(mm) Hole CountXBore Diameter	尺寸 Size	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	HxB	S	GL	SW	PCS
LNE-MD-PG9/2X3	PG9	2X3	2X3	6.5	18.0	100
LNE-MD-PG9/4X1	PG9	4X1	1X4	6.5	18.0	100
LNE-MD-PG13.5/2X5	PG13.5	2X5	2X5	7.5	22.0	50
LNE-MD-PG13.5/7X2	PG13.5	7X2	7X2	7.5	22.0	50
LNE-MD-PG13.5/6X3	PG13.5	6X3	6X3	7.5	22.0	50
LNE-MD-PG16/2X6	PG16	2X6	2X6	7.0	24.0	50
LNE-MD-PG21/4X6	PG21	4X6	4X6	8.0	30.0	30
LNE-MD-PG21/2X7	PG21	2X7	2X7	8.0	30.0	30
LNE-MD-PG21/3X7	PG21	3X7	3X7	8.0	30.0	30
LNE-MD-PG21/2X6/2X10	PG21	2X6/2X10	2X(6-10)	8.0	30.0	30
LNE-MD-PG21/2X8	PG21	2X8	2X8	8.0	30.0	30
LNE-MD-PG21/2X6	PG21	2X6	2X6	8.0	30.0	30
LNE-MD-PG21/3X7	PG21	3X7	3X7	8.0	30.0	30
LNE-MD-PG29/3X9	PG29	3X9	3X9	9.5	40.0	20
LNE-MD-PG29/2X8.5	PG29	2X8.5	2X8.5	9.5	40.0	20
LNE-MD-PG29/4X9	PG29	4X9	4X9	9.5	40.0	20
LNE-MD-PG29/2X12	PG29	2X12	2X12	9.5	40.0	20
LNE-MD-PG36/2X15	PG36	2X15	2X15	12.0	50.0	10
LNE-MD-PG36/5X9	PG36	5X9	5X9	12.0	50.0	10

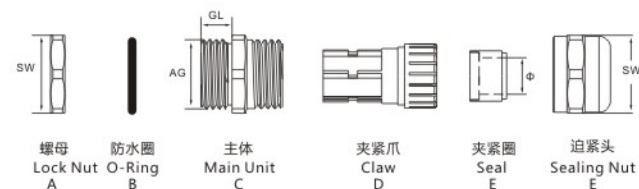

LNE-M-RCK 黄铜铠装隔爆型电缆防水接头 Brass Explosion-Resistant Cable Gland



产品材质: 采用优质黄铜镀镍, 密封件采用硅橡胶、氯丁橡胶。
 螺纹规格: 公制(M)、英制(G)
 工作温度: -40°C- +100°C
 防护等级: IP68
 应用领域: 适用于1区、2区危险气体区域和21区和22区粉尘易爆区域, 室内室外均可使用。

Product material: Adopt high quality nickel-plated brass, the seal is made of silicone rubber and neoprene.
Thread specification: Metric, G
Working temperature: -40°C ~ +100°C
Protection classification: IP68
Application: Suitable for Zone 1 and Zone 2 hazardous gas zones and Zone 21 and Zone 22 dust-prone areas, both indoors and outdoors.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	电缆范围 Cable Range	铠装层 Armour	电缆内径 Cable Inner	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench
No.	M	D	A	C	GL	SW
LNE-M-RCK-M20-13	M20×1.5	6.0-13.4	0-0.9	3.1-8.6	15.0	24
LNE-M-RCK-M20-15	M20×1.5	9.5-15.9	0-1.25	6.1-11.6	15.0	24
LNE-M-RCK-M20-20	M20×1.5	12.5-20.9	0-1.25	6.5-13.9	15.0	30
LNE-M-RCK-M25-26	M25×1.5	17.0-26.2	0-1.6	11.1-19.9	15.0	41
LNE-M-RCK-M32-33	M32×1.5	22.9-33.9	0-2.0	17.0-26.2	15.0	48
LNE-M-RCK-M40-40	M40×1.5	26.0-40.4	0-2.0	22.0-32.1	15.0	55
LNE-M-RCK-M50-46	M50×1.5	35.0-46.7	0-2.5	29.5-38.1	16.0	63
LNE-M-RCK-M50-53	M50×1.5	38.0-53.1	0-2.5	35.6-44.0	16.0	72
LNE-M-RCK-M63-59	M63×1.5	45.6-59.4	0-2.5	40.1-49.9	17.0	72
LNE-M-RCK-M63-65	M63×1.5	54.6-65.9	0-2.5	47.2-55.9	17.0	80
LNE-M-RCK-M75-72	M75×1.5	57.0-72.1	0-2.5	52.8-61.9	18.0	95
LNE-M-RCK-M75-78	M75×1.5	60.4-78.5	0-3.15	59.1-67.9	18.0	100
LNE-M-RCK-M90-90	M90×1.5	69.2-90.4	0-3.15	66.6-79.3	22.0	115

订货号 Order No.	螺纹标准(英制) Thread standard(G)	电缆范围 Cable Range	铠装层 Armour	电缆内径 Cable Inner	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench
No.	M	D	A	C	GL	SW
LNE-M-RCK-G1/2-13	G1/2	6.0-13.4	0-0.9	3.1-8.6	16.0	24
LNE-M-RCK-G1/2-15	G1/2	9.5-15.9	0-1.25	6.1-11.6	16.0	24
LNE-M-RCK-G1/2-20	G1/2	12.5-20.9	0-1.25	6.5-13.9	16.0	30
LNE-M-RCK-G3/4-26	G3/4	17.0-26.2	0-1.6	11.1-19.9	20.0	41
LNE-M-RCK-G1-33	G1	22.9-33.9	0-2.0	17.0-26.2	20.0	48
LNE-M-RCK-G1-1/4-40	G1-1/4	26.0-40.4	0-2.0	22.0-32.1	20.0	55
LNE-M-RCK-G1-1/2-46	G1-1/2	35.0-46.7	0-2.5	29.5-38.1	20.0	63
LNE-M-RCK-G2-53	G2	38.0-53.1	0-2.5	35.6-44.0	20.0	72
LNE-M-RCK-G2-59	G2	45.6-59.4	0-2.5	40.1-49.9	20.0	72
LNE-M-RCK-G2-1/2-65	G2-1/2	54.6-65.9	0-2.5	47.2-55.9	28.0	80
LNE-M-RCK-G2-1/2-72	G2-1/2	57.0-72.1	0-2.5	52.8-61.9	28.0	95
LNE-M-RCK-G3-78	G3	60.4-78.5	0-3.15	59.1-67.9	30.0	100
LNE-M-RCK-G3-90	G3	69.2-90.4	0-3.15	66.6-79.3	30.0	115


LNE-M-RCK 黄铜铠装隔爆型电缆防水接头 Brass Explosion Resistant Cable Gland



产品材质: 采用优质黄铜镀镍, 密封件采用硅橡胶、氯丁橡胶。
螺纹规格: 美制 (NPT)
工作温度: -40°C ~ +100°C
防护等级: IP68
应用领域: 适用于1区、2区危险气体区域和21区和22区粉尘易爆区域, 室内室外均可使用。

Product material: Adopt high quality nickel-plated brass, the seal is made of silicone rubber and neoprene.
Thread specification: NPT
Working temperature: -40°C ~ +100°C
Protection classification: IP68
Application: Suitable for Zone 1 and Zone 2 hazardous gas zones and Zone 21 and Zone 22 dust-prone areas, both indoors and outdoors.

订货号 Order No.	螺纹标准(美制) Thread standard(NPT)	电缆范围 Cable Range	铠装层 Armour	电缆内径 Cable Inner	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench
No.	NPT	D	A	C	GL	SW
LNE-M-RCK-1/2NPT-13	1/2NPT	6.0-13.4	0-0.9	3.1-8.6	16.0	24
LNE-M-RCK-1/2NPT-15	1/2NPT	9.5-15.9	0-1.25	6.1-11.6	16.0	24
LNE-M-RCK-1/2NPT-20	1/2NPT	12.5-20.9	0-1.25	6.5-13.9	16.0	30
LNE-M-RCK-3/4NPT-26	3/4NPT	17.0-26.2	0-1.6	11.1-19.9	16.0	41
LNE-M-RCK-1NPT-33	1NPT	22.9-33.9	0-2.0	17.0-26.2	20.0	48
LNE-M-RCK-1-1/4NPT-40	1-1/4NPT	26.0-40.4	0-2.0	22.0-32.1	20.0	55
LNE-M-RCK-1-1/2NPT-46	1-1/2NPT	35.0-46.7	0-2.5	29.5-38.1	20.0	63
LNE-M-RCK-2NPT-53	2NPT	38.0-53.1	0-2.5	35.6-44.0	20.0	72
LNE-M-RCK-2NPT-59	2NPT	45.6-59.4	0-2.5	40.1-49.9	20.0	72
LNE-M-RCK-2-1/2NPT-65	2-1/2NPT	54.6-65.9	0-2.5	47.2-55.9	28.0	80
LNE-M-RCK-2-1/2NPT-72	2-1/2NPT	57.0-72.1	0-2.5	52.8-61.9	28.0	95
LNE-M-RCK-3NPT-78	3NPT	60.4-78.5	0-3.15	59.1-67.9	30.0	100
LNE-M-RCK-3NPT-90	3NPT	69.2-90.4	0-3.15	66.6-79.3	30.0	115

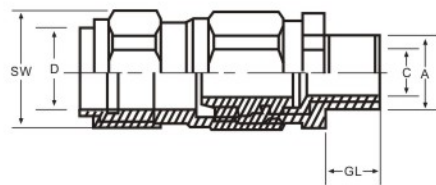

LNE-MFW 黄铜防折断电缆防水接头 Brass Anti Breaking Waterproof Cable Gland



产品材质: 采用优质黄铜镀镍, O型密封圈采用丁腈橡胶NBR制成。
螺纹规格: 公制(M)、德制(PG)、英制(G)及美制(NPT)。
工作温度: -40°C至+110°C, 短时可达+120°C。
防护等级: IP68
产品特性: 夹紧爪与夹紧圈一体成型之设计, 配合迫紧头装配省时便利, 夹紧电缆范围大, 抗拉力强, 可防水、防尘、抗盐、耐酸碱、酒精、油、脂及一般溶剂。

Product material: High quality nickel-plated brass, O-shape sealing ring is NBR.
Thread specifications: Metric, PG, G, NPT
Working temperature: -40°C ~ +110°C, instantaneously can be 120 °C.
Protection classification: IP68
Property: With design of clamping claw and sealing, easy & fast assembled by sealing nut, each specification has a scope clamping, with high tensile strength, dust resistant and inactive with salts, acids, alkalis, oils and greases as well as general dissolvent.

订货号 Order No.	螺纹标准(公制) Thread standard(M)	卡口范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	(mm)	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	M	Φ	AG	D	GL	SW	PCS
LNE-MFW-M12	M12	3-6	12.0	6.8	6.5	14.0	50
LNE-MFW-M16	M16	4-8	16.0	10.3	6.0	20.0	50
LNE-MFW-M18	M18	5-10	20.0	14.3	6.0	24.0	50
LNE-MFW-M20	M20	6-12	25.0	18.4	7.0	30.0	20
LNE-MFW-M25	M25	8-16	25.0	18.4	7.0	30.0	20
LNE-MFW-M32	M32	15-22	25.0	18.4	7.0	30.0	20
LNE-MFW-M40	M40	21-30	25.0	18.4	7.0	30.0	20

订货号 Order No.	螺纹标准(德制) Thread standard(PG)	卡口范围(mm) Range Of Bayonet	外径(mm) Outer Diameter	(mm)	螺纹长度(mm) Thread Length	扳手尺寸(mm) Wrench	包装单位(只/包) Packaging Unit
No.	PG	Φ	AG	D	GL	SW	PCS
LNE-MFW-PG7	PG7	3-6	12.5	6.8	5.0	14.0	50
LNE-MFW-PG9	PG9	4-8	15.2	8.2	6.0	17.0	50
LNE-MFW-PG11	PG11	5-10	18.6	10.3	6.0	20.0	50
LNE-MFW-PG13.5	PG13.5	6-12	20.4	12.3	6.5	22.0	20
LNE-MFW-PG16	PG16	7-14	22.5	14.3	6.5	24.0	20
LNE-MFW-PG21	PG21	13-18	28.3	18.4	7.0	30.0	20
LNE-MFW-PG29	PG29	18-25	28.3	18.4	7.0	30.0	20

